



Want to streamline your application?

Contact TESCOM today and let us simplify your pressure, flow or measurement application. We have the experience and expertise you need!

We are your worldwide partner in precision pressure control.

Contact TESCOM:

Americas

USA
 T +1 800 447 1250
 +1 763 241 3238
 F +1 763 241 3224
 na.tescom@emerson.com
 www.tescom.com

Europe

Germany
 T +49 (0)3 88 23/31-287
 F +49 (0)3 88 23/31-140
 eu.tescom@emerson.com
 www.tescom-europe.com

United Kingdom
 T +44 1698 424 254
 F +44 1698 459 299
 uk.tescom@emerson.com
 www.tescom.com

Asia Pacific

China
 T +86 21 2892 9499
 F +86 21 2892 9001
 apc.tescom@emerson.com
 www.tescom.com

Middle East & Africa

United Arab Emirates
 T +971 4 811 8443
 F +971 4 886 5465
 mea.tescom@emerson.com
 www.tescom.com

©TESCOM Corporation, 2009; All Rights Reserved.
 TESCOM is a business unit of Emerson Process Management Regulator Technologies, Inc.
 Trademarks are property of divisions of Emerson Process Management.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, expressed or implied, regarding the products or services described herein or their use or applicability. We reserve the right to modify or improve the designs or specifications of such product at any time without notice.

Worldwide technical support and distribution.

Represented by:

TESCOM

Aircraft Charging Carts

EXPERIENCED

SUPPORT

EASY TO USE

RUGGED

SAFE

SOLID EQUIPMENT
SOLID SUPPORT



Complete pressure control solutions for your industry.

TESCOM


EMERSON[™]
Process Management

Charging carts that are tough to beat!

Modular block manifold

- Unique block manifold design greatly minimizes potential leak paths
- Modular style manifold and cartridge components significantly reduces service time
- Most cart components (e.g., regulators, valves, tires, hoses) are interchangeable throughout the models ... fewer spare parts are needed in inventory
- Check valve design eliminates excess loss of pressure or media... no backfilling!

Quick media replenishment

- Carts are designed for easy bottle removal
- Six bottle cart features an optional 300 lb. capacity ladder providing a 16 ft (4.87 m) maximum work height
- Onboard recharge system - replenish source without time-consuming bottle removal ... saves time & money!
- Control panel is easy to access & read
- Custom colors, graphics & logos available upon request

Thick wall steel construction

- Pressure control instrumentation shielded from weather
- Full 1 year replacement warranty for all carts!
- Heavy-duty thick wall steel construction means a long service life
- Durable powder coat paint is standard

Safety is built in

- All carts designed for optimal safety...
 - manifolds are constructed of brass & cleaned for oxygen service
 - manifold soft goods are oxygen compatible
 - prominent labels warn of potential safety hazards
- Oxygen pressure system independently tested and verified by Wendell Hull & Associates - leading oxygen experts
- All pressure systems meet ASTM G93 & CGA 4.3 requirements
- All instructions & parts lists included

Charger3 three bottle cart

Specifications


Weight	900 lbs (408.2 kg)
Capacity	450 lbs (204.1 kg)
Width	58.5 in (148.59 cm)
Length	88.5 in (224.79 cm)
Height A	40.5 in (102.87 cm)
Height B	67.5 in (171.45 cm)

Part No.	Description
UA-3B	3-bottle Oxygen Charge Cart with 3 bottle manifold
UA-3G	Galvanized 3-bottle Oxygen Charge Cart with 3 bottle manifold
UA-1T	3-bottle Nitrogen Charge Cart with 3 bottle Nitrogen manifold



Optional Auto Cascade Manifold


Maximize bottle consumption and eliminate the need to manually switch bottles with the auto cascade manifold. This unique design automatically fills from the lowest source. When the source and fill pressure equalize, the auto cascade seamlessly switches to the next bottle. Charge and fill at the same time!

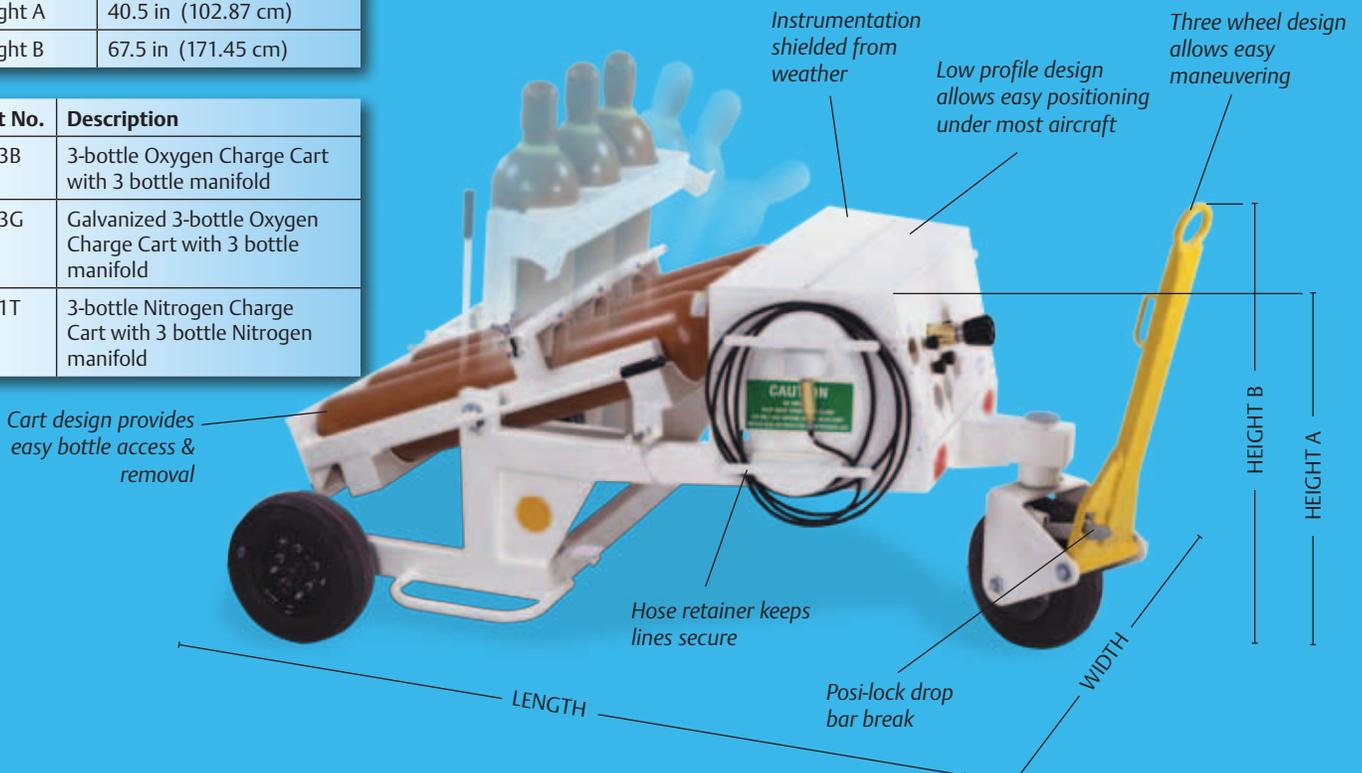

Charger2 two bottle cart

Specifications	
Weight	300 lbs (136 kg)
Capacity	300 lbs (136 kg)
Width	32.5 in (82.55 cm)
Length	36.0 in (91.44 cm)
Height	64.0 in (162.56 cm)

Part No.	Description
UA-6T	2-bottle Oxygen Charge Cart
UA-4T	2-bottle Nitrogen Charge Cart
UA-5T	2-bottle Helium Charge Cart

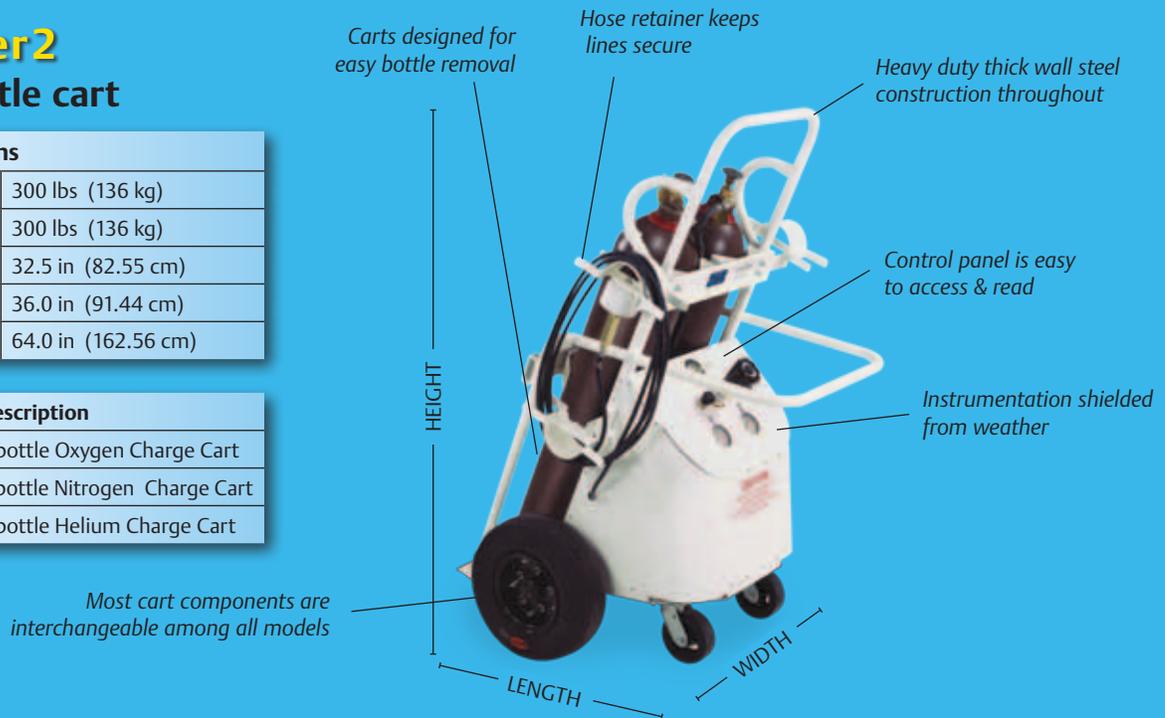

Charger6 six bottle cart

Specifications	
Weight	1760 lbs (798.3 kg)
Capacity	900 lbs (408.2 kg)
Width	54.5 in (138.43 cm)
Length	95.0 in (241.3 cm)
Height	82.5 in (209.55 cm)
Optional Ladder	12.0 ft (3.65 m)

Part No.	Description
UA-2BT	6-bottle Oxygen Charge Cart without ladder
UA-2T	6-bottle Oxygen Charge Cart with ladder
UA-2G	Galvanized 6-bottle Oxygen Charge Cart
UA-7BT	6-bottle Nitrogen Charge Cart without ladder
UA-7T	6-bottle Nitrogen Charge Cart with ladder
UA-8T	6-bottle Helium Charge Cart



Instrument control panel is easy to access & read

